					ST DEPARTMENT DIVISION O	OF NA					AMEN	FO DED REPC	RM 3		
		APPI	LICATION	FOR P	ERMIT TO DRILL					1. WELL NAME and	NUMBEI GMBU L-				
2. TYPE (RILL NEW WELL ((REENT	ER P&A	WELL DEEPE	EN WELL				3. FIELD OR WILDO		NT BUTTE			
4. TYPE (OF WELL	Oil '	Well (Coalbed	I Methane Well: NO					5. UNIT or COMMUI	NITIZAT GMBU (EEMENT	NAME	
6. NAME	OF OPERATOR	t			TON COMPANY					7. OPERATOR PHONE 435 646-4825					
8. ADDRE	SS OF OPERA				9. OPERATOR E-MA	IL	ewfield.co	m							
	RAL LEASE NO		Rt 3 Box 363	\		$\overline{}$	12. SURFACE OWN	ERSHIP		_					
		UTU-34173 OWNER (if box 1	12 = 'fee')) STATE (_) FEE(FEDERAL (INC. 14. SURFACE OWNE	DIAN () ER PHON	STATE		FEE () ee')				
		ACE OWNER (if b		')						16. SURFACE OWN					
					18. INTEND TO COM	4MTNGL	E PRODUCT	TON FROM	1	19. SLANT					
	AN ALLOTTEE 2 = 'INDIAN')	OR TRIBE NAME			MULTIPLE FORMATI	IONS	gling Applicat		_	VERTICAL DIR	RECTIONA	AL 📵	HORIZON	ITAL 🔵	
20. LOC	ATION OF WE	LL		FOO'	TAGES	QТ	R-QTR	SECT	ION	TOWNSHIP	R/	ANGE	МЕ	RIDIAN	
LOCATIO	ON AT SURFAC	CE	2	054 FNI	L 635 FEL	9	SENE	33		8.0 S	16	5.0 E		S	
Top of U	ppermost Pro	ducing Zone	25	17 FNL	. 1057 FEL	9	SENE	33		8.0 S	16	5.0 E		S	
At Total	Depth		23	71 FSL	. 1459 FEL	N	NWSE	33				5.0 E		S	
21. COUN		DUCHESNE		2	22. DISTANCE TO N		T LEASE LIN 69	IE (Feet)		23. NUMBER OF AC	RES IN I		UNIT		
					25. DISTANCE TO N (Applied For Drilling		mpleted)	AME POOI	L	26. PROPOSED DEP		TVD: 652	28		
27. ELEV	ATION - GROU	JND LEVEL		2	28. BOND NUMBER	9.				29. SOURCE OF DRI			TE ADD	LICABLE	
		5600					00493			WATER RIGHTS AP	437		IF APP	LICABLE	
String	Hole Size	Casing Size	Length	Weic	Hole, Casing,		ement Inf Max Mu		1	Cement		Sacks	Yield	Weight	
Surf	12.25	8.625	0 - 300	24.			8.3			Class G		138	1.17	15.8	
Prod	7.875	5.5	0 - 6528	15.	.5 J-55 LT	&C	8.3	3	Prem	ium Lite High Stre	ngth	313	3.26	11.0	
										50/50 Poz		363	1.24	14.3	
					A ⁻	ТТАСН	IMENTS								
	VERIFY T	HE FOLLOWIN	G ARE ATT	ACHE	D IN ACCORDAN	ICE WI	TH THE U	TAH OIL	AND G	AS CONSERVATI	ON GEI	NERAL F	ULES		
✓ w	ELL PLAT OR	MAP PREPARED E	Y LICENSED	SURV	EYOR OR ENGINEE	R	№ сом	IPLETE DR	ILLING	PLAN					
AFFIDAVIT OF STATUS OF SURFACE OWNER AGREEMENT (IF FEE SURFACE)								4 5. IF OP	ERATOI	R IS OTHER THAN TI	HE LEAS	E OWNER	1		
DRILLED		URVEY PLAN (IF	DIRECTION	ALLY O	R HORIZONTALLY		торо	OGRAPHIC	AL MAF	•					
NAME M	andie Crozier				TITLE Regulatory	Tech			PHON	NE 435 646-4825					
SIGNAT	URE				DATE 04/14/2011				EMAI	L mcrozier@newfield.	com				
	MBER ASSIGN 1350677(B	Myzon									
					Pe	ermit Manager									

NEWFIELD PRODUCTION COMPANY GMBU L-33-8-16 AT SURFACE: SE/NE SECTION 33, T8S, R16E DUCHESNE COUNTY, UTAH

TEN POINT DRILLING PROGRAM

1. **GEOLOGIC SURFACE FORMATION:**

Uinta formation of Upper Eocene Age

2. **ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:**

 Uinta
 0' – 1670'

 Green River
 1670'

 Wasatch
 6340'

 Proposed TD
 6528'

3. <u>ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:</u>

Green River Formation (Oil) 1670' – 6340'

Fresh water may be encountered in the Uinta Formation, but would not be expected below about 350'. All water shows and water bearing geologic units shall be reported to the geologic and engineering staff of the Vernal Office prior to running the next string of casing or before plugging orders are requested. All water shows must be reported within one (1) business day after being encountered.

All usable (<10,000 PPM TDS) water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. This information shall be reported to the Vernal Office.

Detected water flows shall be sampled, analyzed, and reported to the geologic & engineering staff of the Vernal Office. The office may request additional water samples for further analysis. Usage of the State of Utah form *Report of Water Encountered* is acceptable, but not required.

The following information is requested for water shows and samples where applicable:

Location & Sampled Interval Date Sampled Flow Rate Temperature

Hardness pH

Water Classification (State of Utah)

Dissolved Calcium (Ca) (mg/l)

Dissolved Iron (Fe) (ug/l)

Dissolved Sodium (Na) (mg/l)

Dissolved Carbonate (CO₃) (mg/l)

Dissolved Bicarbonate (NaHCO₃) (mg/l)

Dissolved Sulfate (SO₄) (mg/l)

Dissolved Total Solids (TDS) (mg/l)

4. PROPOSED CASING PROGRAM

a. Casing Design: GMBU L-33-8-16

Size	lı	nterval	Weight	Grade	Coupling	Coupling Design Fa		ors
Size	Тор	Bottom	Weight Grade		Coupling	Burst	Collapse	Tension
Surface casing	0'	300'	24.0	J-55	STC	2,950	1,370	244,000
8-5/8"	U	300			17.53	14.35	33.89	
Prod casing	0'	6 F00'	15.5	J-55	LTC	4,810	4,040	217,000
5-1/2"	U	6,528'	15.5		LIC	2.32	1.95	2.14

Assumptions:

- 1) Surface casing max anticipated surface press (MASP) = Frac gradient gas gradient
- 2) Prod casing MASP (production mode) = Pore pressure gas gradient
- 3) All collapse calculations assume fully evacuated casing w/ gas gradient
- 4) All tension calculations assume air weight

Frac gradient at surface casing shoe = 13.0 ppg
Pore pressure at surface casing shoe = 8.33 ppg
Pore pressure at prod casing shoe = 8.33 ppg
Gas gradient = 0.115 psi/ft

All casing shall be new or, if used, inspected and tested. Used casing shall meet or exceed API standards for new casing.

All casing strings shall have a minimum of 1 (one) centralizer on each of the bottom three (3) joints.

b. Cementing Design: GMBU L-33-8-16

Job	Fill	Description	Sacks ft ³	OH Excess*	Weight (ppg)	Yield (ft³/sk)	
Surface casing	300'	Class G w/ 2% CaCl	138	30%	15.8	1.17	
- Curiado dading	000	01000 0 W/ 2/0 0001	161	0070	10.0		
Prod casing	4,528'	Prem Lite II w/ 10% gel + 3%	313	30%	11.0	3.26	
Lead	4,526	KCI	1020	30 /0	11.0	3.20	
Prod casing	2,000'	50/50 Poz w/ 2% gel + 3%	363	30%	14.3	1.24	
Tail	2,000	KCI	451	30%	14.3	1.24	

^{*}Actual volume pumped will be 15% over the caliper log

- Compressive strength of lead cement: 1800 psi @ 24 hours, 2250 psi @ 72 hours
- Compressive strength of tail cement: 2500 psi @ 24 hours

Hole Sizes: A 12-1/4" hole will be drilled for the 8-5/8" surface casing. A 7-7/8" hole will be drilled for the 5-1/2" production casing.

The 8-5/8" surface casing shall in all cases be cemented back to surface. In the event that during the primary surface cementing operation the cement does not circulate to surface, or if the cement level should fall back more than 8 feet from surface, then a remedial surface cementing operation shall be performed to insure adequate isolation and stabilization of the surface casing.

5. MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:

The operator's minimum specifications for pressure control equipment are as follows:

An 8" Double Ram Hydraulic unit with a closing unit will be utilized. Function test of BOP's will be check daily.

Refer to Exhibit C for a diagram of BOP equipment that will be used on this well.

6. TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:

From surface to ± 350 feet will be drilled with an air/mist system. The air rig is equipped with a 6 ½" blooie line that is straight run and securely anchored. The blooie line is used with a discharge less than 100 ft from the wellbore in order to minimize the well pad size. The blooie line is not equipped with an automatic igniter or continuous pilot light and the compressor is located less than 100 ft from the well bore due to the low possibility of combustion with the air dust mixture. The trailer mounted compressor (capacity of 2000 CFM) has a safety shut-off valve which is located 15 feet from the air rig. A truck with 70 bbls of water is on stand by to be used as kill fluid, if necessary. From about ± 350 feet to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCl substitute additive. This additive will be identified in the APD and reviewed to determine if the reserve pit shall be lined. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite

No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of this well.

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

Newfield Production will **visually** monitor pit levels and flow from the well during drilling operations.

7. <u>AUXILIARY SAFETY EQUIPMENT TO BE USED</u>:

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

8. <u>TESTING, LOGGING AND CORING PROGRAMS</u>:


The logging program will consist of a Dual Induction, Gamma Ray and Caliper log from TD to base of surface casing @ 300' +/-, and a Compensated Neutron-Formation Density Log from TD to 3500' +-. A cement bond log will be run from PBTD to cement top. No drill stem testing or coring is planned for this well.


9. ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:


No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous drilling in the area at this depth. Maximum anticipated bottomhole pressure will approximately equal total depth in feet multiplied by a 0.433 psi/foot gradient.


10. <u>ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:</u>

It is anticipated that the drilling operations will commence the third quarter of 2011, and take approximately seven (7) days from spud to rig release.

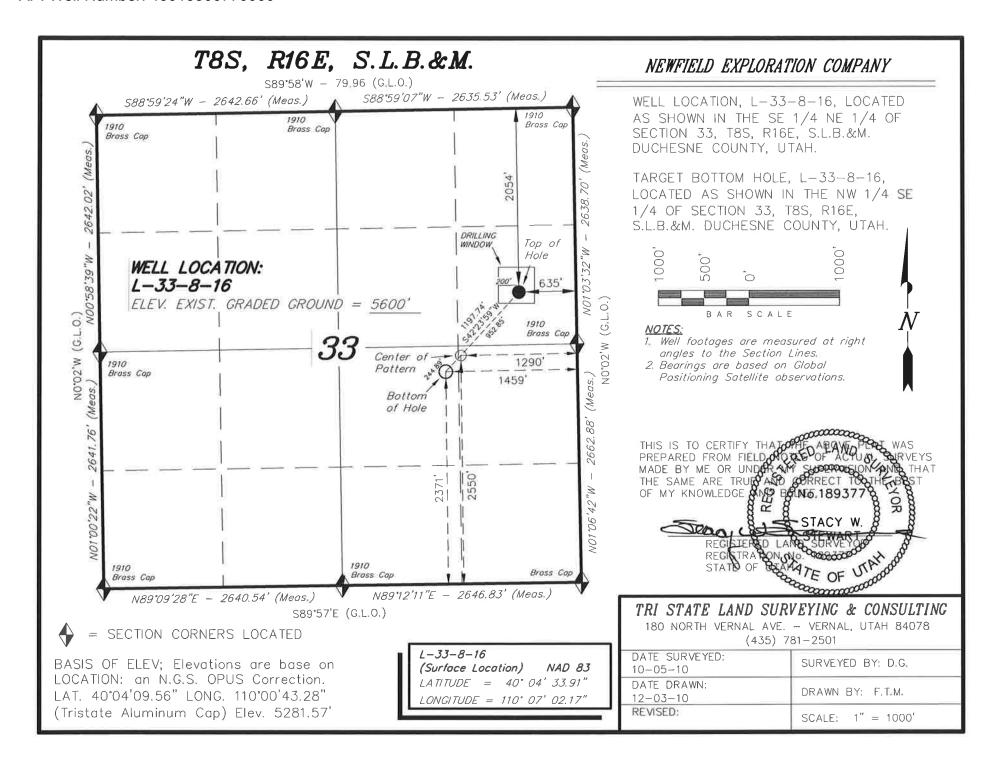


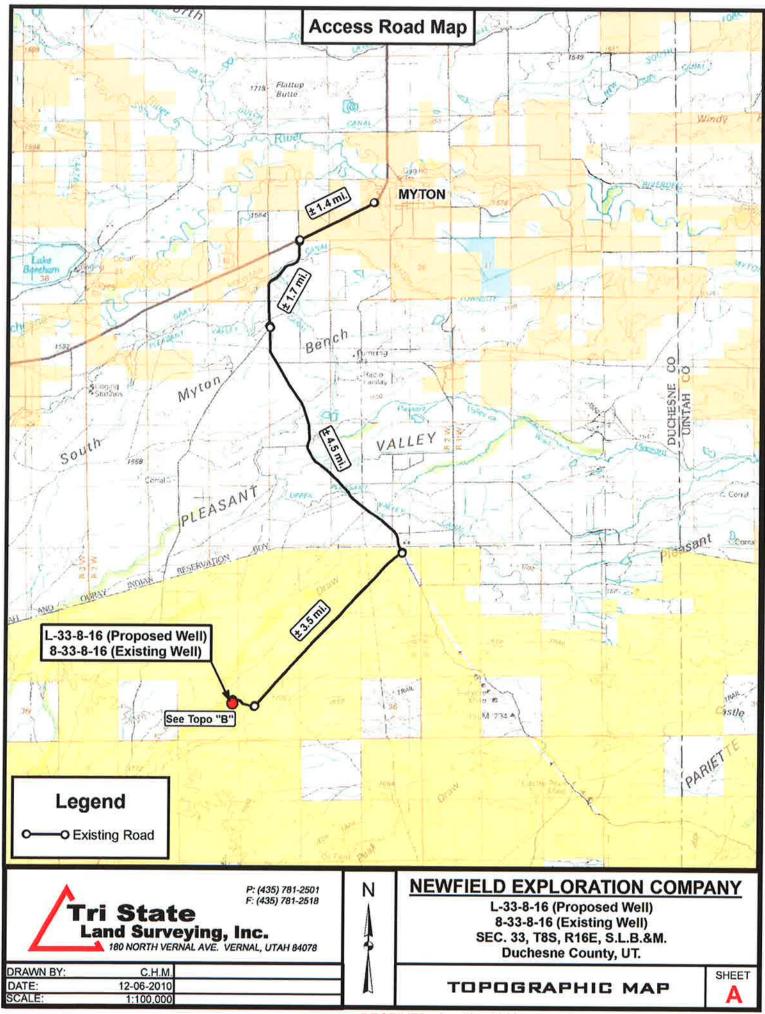

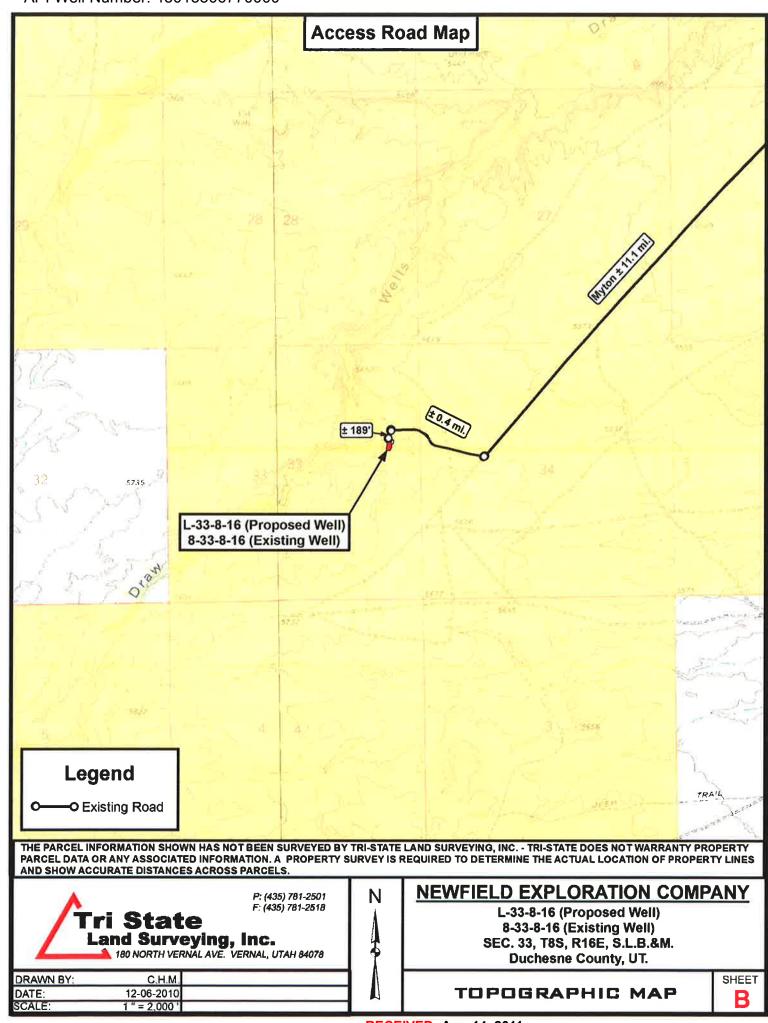

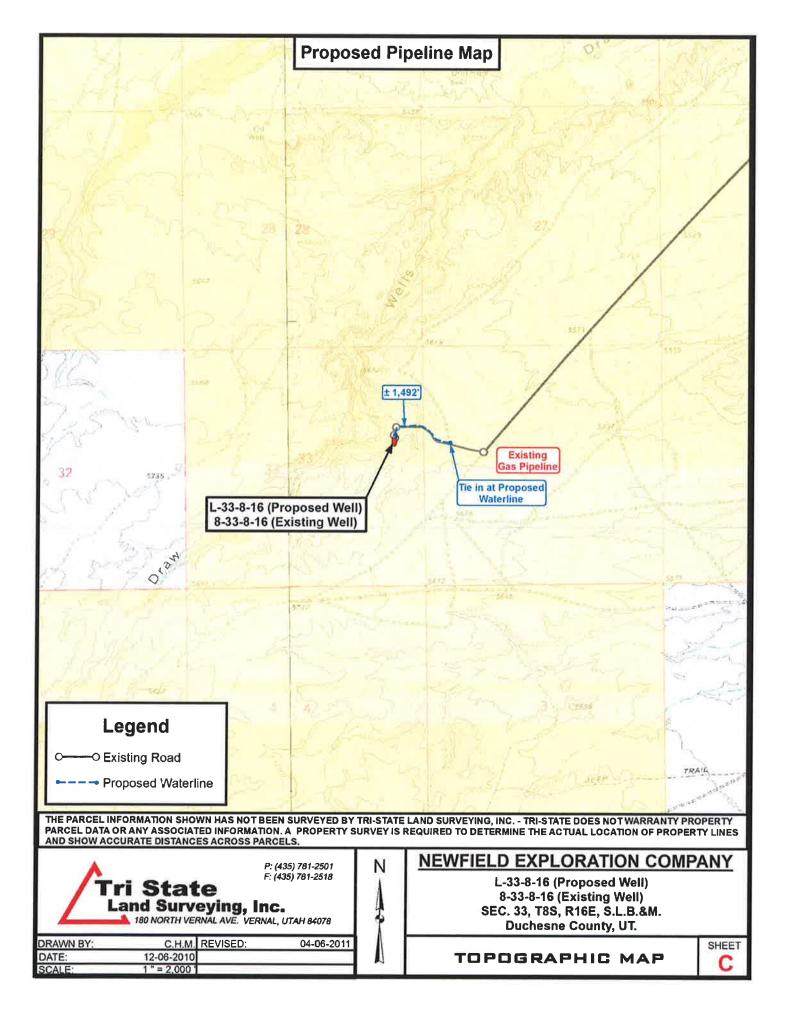

Marvellohd Weils 11 12 13 14 15 15 15 15 15 15 15 15 15	API Well Num	ber <u>: 43</u>	30135	0677	0000	-												or reactive
				8	P P		R			1	£ ,	3		2	2	,+		1
		10	2	At West	Abendo Irondon a Well	Mons Mons	8	-		A-			*	n C	, R		ł	3
		d Well	Des Spr	Anching O Secting O or Injury	pormity ped 3 A 1 h or Source	fion Sta		+3	42-42		*	v3 **	C R	a	я	FIE	HIBIR A	
		Sagara	Sart	446		In the case of the		4	/H	·5		4	Ĕ—	-	-	VEW	N. E.	E
			T-		1	T	-	1	44			3	£	R	-	M		344
			-	2	2	30	я	1/		1		+j		- L	,	1 -		155
			=	2	n	25	អ	1411	4341		1			1				
		-	-	-	-	-		12.5	1 40 40	• T . 2		r *!	·\$ n	z	8	-	=	:
			2		- I	2	2 7/1	7 7 T	्री ^{त्र} सम				11				1	
			†		3		101	7	44 4 -	8		£				1	te	
				-	1		12	444	42 M	ri e at	双 精 普		33 2	-1	e e		TIES.	
			•		£	£	/= <u>8</u>	4 4 4 4 A	1 00	. 15 07	10 of 105			4 42 kg	-			
			-	-	-	-	केन थे । इंग्रेज च	·至 · 5 十字	. 2 . M	2.情叹	40	12	\$ \$. 7 \$		Ħ	*	n	
		۰	*	ē		* * * * * * * * * * * * * * * * * * *	1+1-1	of the	j 4 01		च्या स्थापित स्थापी स्थापी	e] e]	111	10		1		
				2		の中山	4 4 4 2 4	20 324 X	A 12-12	1 1 0	य सं ये मृत्यु	નું નું નોનુક	4 47 45					
				-	-	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	5 Med 201		Na a	1		तं +1 4} । सं +1 4} ।	पुरुष्य विश्व इ.स.च्या इ.स.च्या	2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	24		2	2
		1960	2	2	** t	201	199		42 405 40 4 02 -80	1 × ++	નું તુંદ લંગો તું	ei Val	30 24	1	-		-	
			ļ	ļ		5.42	S VERMIN	51.d.:	45 K 3	K.	tid d	الدائلة		1	×			- 2
			9		44	1/1	1979	141	4.0	3414	140	V14)	4 7 4		ā			42
				Ĺ	45		7 4 7	RITAL	e 0	1 1 12 4	1 42 42 "		Mej de	1			100	-
				-		T NIV	200 12 02 1	14 15 d	A-105			474	100	Ñ	8			1
			•	0	44	1	141	1050	317.14	M		वित्री । अस्तरा					١.	
				9	4 4	1 1	14/14/1	机提			1 1	ivii Vido	4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	1 1 7 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1				
					*2		1404			To di		4 4	4 441. 4 4 4.	8	ā		-	9
		7.	2	0	7. e. e. e.	4 45 M	NI N	CAN CONTRACT	1 2 1	1	Vi i	1 4 4	** ** ** *	65 65				
					B	10 10	A COLUMN		U. T.	NA	1-3	ାଣ୍ଡିଲ ଅନୁସ୍ଥ	ej ej ej • ej ki d .		×		-	
					-2	4 2 4	级护						ાનન નિયાની નિયાની	+2	R		2	14
		-	2	÷ 2	12 474	R	+5/1	THE P	4 V.	1 1		- X ()	न प्रत्ये । न प्रत्ये	67			iu	-
				170.0		ı ı	1 1	1147	4 - 4	2		197	4 44	10 th		18	4	f
			•				· · ·	100	1100	2 2 2	13 es	1 44	1 2 4	R 16	8		£.	
		,		2	£	p)	Trans.	95			4	1444	192 of of of	<u>8</u>				-
					*2	1052	8	基础	K	21 +2 ·	44		न वर्ष के सम्बद्ध	£ 144	×	*	•	
	v	= "		\$	E	· · · · · · · · · · · · · · · · · · ·		34.04	140	12		चेत्री में संबंध	4 4 4	Œ.				
				2	2.	n	+3	E .	100	1.			न न १ व न न १ व	38.				_
				>			, E	4 1	410 4	12.0	47	14	44.44	क्ष वे वे क्ष वे व	*	μ.,		4
		3 ~	3 50	200	а	×	M X		राग्रा	1 3	3	444	47044	-5 H-5 -5 -5			F	
					_			100	The state of		10.0				Æ	10.0		,
			ş	.9.		8		•	9	104		1147	44	6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6	x	1 ·	9	12
		•	•	2		E.	я	•	a	2		-	10 17	19 3 1 3 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	•	5	- t	_

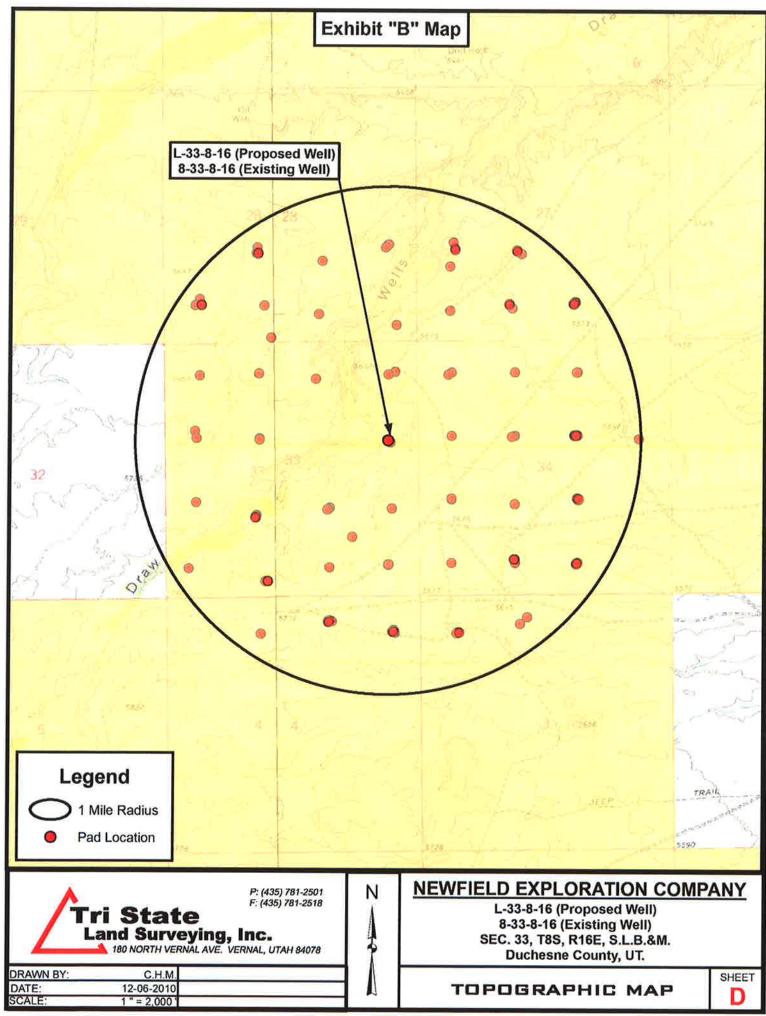



NEWFIELD EXPLORATION

USGS Myton SW (UT) SECTION 33 T8S, R16E L-33-8-16

Wellbore #1

Plan: Design #1

Standard Planning Report

02 December, 2010





PayZone Directional Services, LLC.

Planning Report



Database: Company: Project: Site:

Wellbore:

Design:

Well:

EDM 2003.21 Single User Db NEWFIELD EXPLORATION USGS Myton SW (UT) SECTION 33 T8S, R16E

L-33-8-16 Wellbore #1 Design #1 Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Well L-33-8-16

L-33-8-16 @ 5612.0ft (Original Well Elev) L-33-8-16 @ 5612.0ft (Original Well Elev)

True

Minimum Curvature

Project USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA

Map System: Geo Datum: US State Plane 1983

North American Datum 1983

System Datum:

Mean Sea Level

Map Zone:

Site

Utah Central Zone

SECTION 33 T8S, R16E, SEC 33 T8S, R16E

Site Position: From: Northing: Easting:

2,193,606,22 m 617,001,57 m

Latitude: Longitude: 40° 4' 8,951 N

Position Uncertainty:

Lat/Long 0.0 ft

Slot Radius:

in

Grid Convergence:

110° 7' 41.858 W

0.88°

Well L-33-8-16, SHL LAT: 40 04 33,91 LONG: -110 07 02.17

Well Position

+N/-S +E/-W Northing: Easting: 2,194,390,36 m 617,929,95 m Latitude: Longitude: 40° 4′ 33.910 N 110° 7′ 2.170 W

Position Uncertainty

3,085,3 ft 0.0 ft

2,525.2 ft

Wellhead Elevation:

5,612,0 ft

Ground Level:

5,600.0 ft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination	Dip Angle	Field Strength (nT)
	IGRF2010	2010/12/02	11.41	65.82	52,332

Design Design	#1				
Audit Notes:					
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0	
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)	
	5,300.0	0.0	0.0	222.39	

lan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0,00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,436.7	12.55	222.39	1,430.1	-67.4	-61.5	1.50	1.50	0.00	222.39	
5,401.4	12.55	222,39	5,300.0	-703.7	-642.4	0.00	0.00	0.00	0.00	L-33-8-16 TGT
6,528.4	12.55	222.39	6,400.0	-884.6	-807.5	0.00	0.00	0.00	0.00	



PayZone Directional Services, LLC.

Planning Report



Database: Company: Project: EDM 2003.21 Single User Db NEWFIELD EXPLORATION USGS Myton SW (UT)

SECTION 33 T8S, R16E

Site: Well: Wellbore:

L-33-8-16 Wellbore #1 Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Well L-33-8-16

L-33-8-16 @ 5612.0ft (Original Well Elev) L-33-8-16 @ 5612.0ft (Original Well Elev)

True

Minimum Curvature

gn:	Design #1								
nned Survey	The last				I IV C	/ 100	4	w-	
Measured Depth	Inclination	Azimuth	Vertical Depth	+N/-S	+E/-W	Vertical Section	Dogleg Rate	Build Rate	Turn Rate
(ft)	(°)	(°)	(ft)	(ft)	(ft)	(ft)	(°/100ft)	(°/100ft)	(°/100ft)
0.0		0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0		0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0,00	300,0	0.0	0.0	0,0	0.00	0.00	0.00
400.0	0.00	0.00	400,0	0.0	0.0	0,0	0.00	0.00	0.00
500.0	0.00	0.00	500,0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600,0	0.0	0.0	0.0	0,00	0.00	0.00
700.0	1,50	222,39	700.0	-1.0	-0.9	1.3	1,50	1,50	0.00
800.0	3.00	222.39	799,9	-3.9	-3.5	5.2	1.50	1.50	0.00
900_0	4.50	222.39	899.7	-8.7	-7.9	11.8	1.50	1.50	0.00
1,000.0	6.00	222,39	999.3	-15.5	-14.1	20.9	1.50	1.50	0.00
1,100.0		222,39	1,098.6	-24.1	-22.0	32.7	1,50	1,50	0.00
1,200.0		222.39	1,197.5	-34.7	-31.7	47.0	1.50	1.50	0.00
1,300.0		222,39	1,296.1	-47.2	-43.1	64.0	1.50	1.50	0.00
1,400.0		222.39	1,394.2	-61.6	-56.3	83.5	1.50	1.50	0.00
1,436.7	12,55	222.39	1,430,1	-67.4	-61,5	91.3	1.50	1,50	0.00
1,500.0		222.39	1,491.8	-77.6	-70.8	105.0	0.00	0.00	0.00
1,600.0		222,39	1,589.4	-93.6	-85.5	126.8	0.00	0.00	0.00
1,700.0		222,39	1,687.0	-109.7	-100.1	148.5	0.00	0.00	0.00
1,800.0		222.39	1,784.6	-109.7 -125 ₋ 7	-114.8	170.2	0.00	0.00	0.00
			. 63						
1,900.0		222,39	1,882.3	-141.8	-129.4	192.0	0.00	0.00	0.00
2,000.0		222,39	1,979.9	-157.8	-144.1	213.7	0.00	0.00	0.00
2,100.0	12.55	222.39	2,077.5	-173.9	-158.7	235.4	0.00	0.00	0.00
2,200.0		222.39	2,175.1	-189.9	-173.4	257.1	0.00	0.00	0.00
2,300.0	12,55	222.39	2,272.7	-206.0	-188.0	278.9	0.00	0.00	0.00
2,400.0	12,55	222.39	2,370.3	-222.0	-202,7	300.6	0.00	0.00	0.00
2,500.0	12,55	222.39	2,467.9	-238.1	-217.3	322,3	0.00	0.00	0.00
2,600.0	12.55	222,39	2,565.5	-254.1	-232.0	344.1	0.00	0.00	0.00
2,700.0	12,55	222.39	2,663.1	-270.2	-246.6	365.8	0.00	0.00	0.00
2,800.0	12,55	222,39	2,760.7	-286.2	-261.3	387.5	0.00	0,00	0.00
2,900.0	12,55	222.39	2,858.4	-302.3	-275,9	409.3	0.00	0.00	0.00
3,000.0	12.55	222.39	2,956.0	-318.3	-290,6	431.0	0.00	0.00	0.00
3,100_0	12.55	222,39	3,053.6	-334.4	-305,2	452.7	0.00	0.00	0.00
3,200.0	12,55	222.39	3,151.2	-350.4	-319,9	474.5	0.00	0.00	0.00
3,300.0	12.55	222.39	3,248.8	-366.5	-334,5	496.2	0.00	0.00	0.00
3,400.0	12.55	222.39	3,346.4	-382.5	-349.2	517.9	0.00	0.00	0.00
3,500.0	12,55	222,39	3,444.0	-398.6	-363.8	539.7	0.00	0.00	0.00
3,600.0	12,55	222.39	3,541.6	-414.6	-378.5	561.4	0.00	0.00	0.00
3,700.0	12.55	222,39	3,639.2	-430.7	-393.1	583.1	0.00	0.00	0.00
3,800.0	12,55	222.39	3,736.8	-446.7	-407.8	604.8	0.00	0.00	0.00
3,900.0	12,55	222,39	3,834.5	-462.8	-422.4	626.6	0.00	0.00	0.00
4,000.0	12.55	222.39	3,932.1	-478.8	-437.1	648.3	0.00	0.00	0.00
4,100.0	12,55	222.39	4,029.7	-494.9	-451.7	670.0	0.00	0.00	0.00
4,200.0	12,55	222.39	4,127.3	-510.9	-466.4	691.8	0.00	0.00	0.00
4,300.0	12.55	222.39	4,224.9	-527.0	-481.0	713.5	0.00	0.00	0.00
4,400.0	12.55	222,39	4,322.5	-543.0	-495.7	735,2	0.00	0.00	0.00
4,500.0	12.55	222.39	4,420.1	-559.1	-510.3	757.0	0.00	0.00	0.00
4,600.0	12.55	222.39	4,517.7	-575.1	-525.0	778.7	0.00	0.00	0.00
4,700.0	12.55	222.39	4,615.3	-575.1 -591.2	-525.0 -539.6	800.4	0.00	0.00	0.00
4,700.0	12.55	222.39	4,713.0	-591.2 -607.2	-554.3	822.2	0.00	0.00	0.00
4,900.0	12,55	222.39	4,810.6	-623.3	-568,9	843.9	0.00	0.00	0.00
5,000.0	12,55	222,39	4,908.2	-639.3	-583.6	865.6	0.00	0.00	0.00
5,100.0	12.55 12.55	222.39 222.39	5,005.8 5,103.4	-655.4 -671.4	-598.2 -612.9	887.3 909.1	0.00	0.00	0.00



PayZone Directional Services, LLC.

Planning Report



Database: Company: Project: Site:

Wellbore:

Design:

Well:

EDM 2003.21 Single User Db NEWFIELD EXPLORATION USGS Myton SW (UT) SECTION 33 T8S, R16E

L-33-8-16 Wellbore #1 Design #1 Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Well L-33-8-16

L-33-8-16 @ 5612.0ft (Original Well Elev) L-33-8-16 @ 5612.0ft (Original Well Elev)

True

Minimum Curvature

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,300.0	12,55	222,39	5,201.0	-687.5	-627.5	930.8	0.00	0.00	0.00
5,401.4	12.55	222.39	5,300.0	-703.7	-642.4	952.8	0.00	0.00	0.00
L-33-8-16 TG	T								
5,500.0	12.55	222.39	5,396.2	-719.6	-656.8	974.3	0.00	0.00	0.00
5,600.0	12.55	222.39	5,493.8	-735.6	-671.5	996,0	0,00	0.00	0.00
5,700.0	12.55	222.39	5,591.4	-751.7	-686.1	1,017.7	0.00	0.00	0.00
5,800.0	12,55	222 39	5,689.1	-767.7	-700.8	1,039.5	0.00	0.00	0.00
5,900.0	12.55	222.39	5,786.7	-783.8	-715.4	1,061.2	0.00	0.00	0.00
6,000.0	12.55	222.39	5,884.3	-799.8	-730.1	1,082.9	0.00	0.00	0.00
6,100.0	12.55	222.39	5,981.9	-815.9	-744.7	1,104.7	0.00	0.00	0.00
6,200.0	12,55	222.39	6,079.5	-831.9	-759.4	1,126.4	0.00	0.00	0.00
6,300.0	12.55	222.39	6,177.1	-848.0	-774.0	1,148.1	0.00	0.00	0.00
6,400.0	12.55	222.39	6,274.7	-864.0	-788.7	1,169.9	0.00	0.00	0.00
6,500.0	12.55	222,39	6,372.3	-880.1	-803.3	1,191.6	0.00	0.00	0.00

Targets									
Target Name - hit/miss target - Shape	Dip Angle	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (m)	Easting (m)	Latitude	Longitude
L-33-8-16 TGT - plan hits target - Circle (radius 75.0)	0.00	0.00	5,300.0	-703,7	-642.4	2,194,172.85	617,737,49	40° 4' 26 955 N	110° 7' 10.434 W



Project: USGS Myton SW (UT) Site: SECTION 33 T8S, R16E


Well: L-33-8-16 Wellbore: Wellbore #1 Design: Design #1



Azimuths to True North Magnetic North: 11.41°

Magnetic Field Strength: 52331.6snT Dip Angle: 65.82° Date: 2010/12/02 Model: IGRF2010

KOP @ 600' DOGLEG RATE 1.5 DEG/100 TARGET RADIUS IS 75'

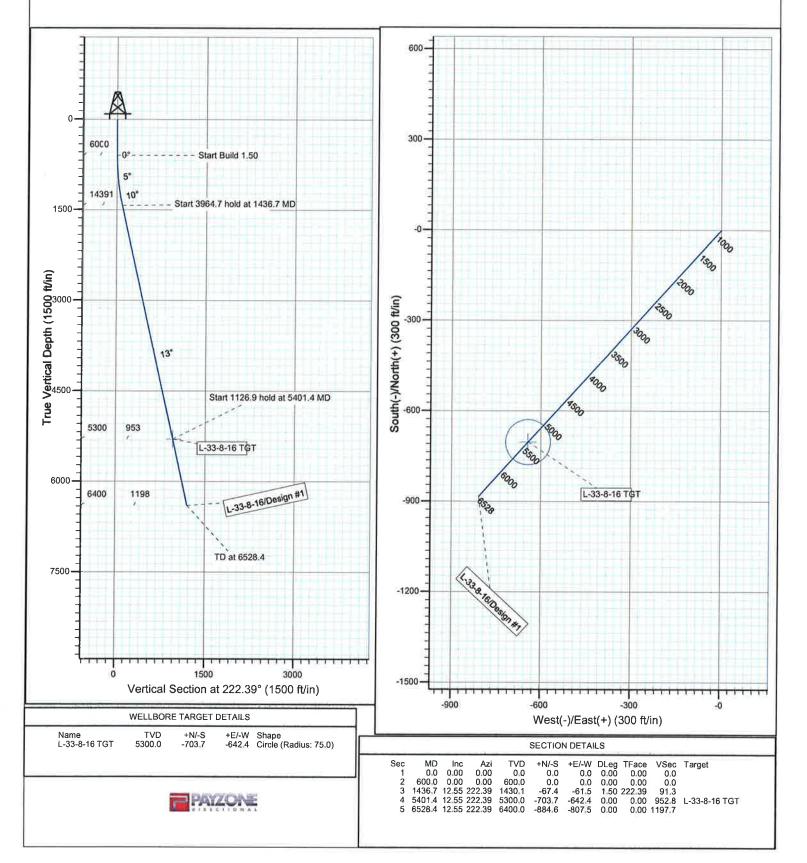

NEWFIELD PRODUCTION COMPANY GMBU L-33-8-16 AT SURFACE: SE/NE SECTION 33, T8S, R16E DUCHESNE COUNTY, UTAH

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. <u>EXISTING ROADS</u>

See attached Topographic Map "A"

To reach Newfield Production Company well location site GMBU L-33-8-16 located in the SE 1/4 NE 1/4 Section 33, T8S, R16E, Duchesne County, Utah:

Proceed southwesterly out of Myton, Utah along Highway 40 - 1.4 miles \pm to the junction of this highway and UT State Hwy 53; proceed southeasterly -6.2 miles \pm to it's junction with an existing road to the southwest; proceed in a southwesterly direction -3.5 miles \pm to it's junction with an existing road to the northwest; proceed northwesterly -0.4 miles \pm to it's junction with the beginning of the access road to the existing 8-33-8-16 well location.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal. Any necessary fill material for repair will be purchase and hauled from private sources.

2. PLANNED ACCESS ROAD

There is no proposed access road for this location. The proposed well will be drilled directionaly off of the existing 8-33-8-16 well pad. See attached **Topographic Map "B"**.

There will be **no** culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

3. <u>LOCATION OF EXISTING WELLS</u>

Refer to Exhibit "B".

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

5. LOCATION AND TYPE OF WATER SUPPLY

Newfield Production will transport water by truck from nearest water source as determined by a Newfield representative for the purpose of drilling the above mentioned well. The available water sources are as follows:

Johnson Water District Water Right: 43-10136

Maurice Harvey Pond Water Right: 47-1358

Neil Moon Pond

Water Right: 43-11787

Newfield Collector Well

Water Right: 47-1817 (A30414DVA, contracted with the Duchesne County Conservancy

District).

There will be no water well drilled at this site.

6. SOURCE OF CONSTRUCTION MATERIALS

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

7. <u>METHODS FOR HANDLING WASTE DISPOSAL</u>

A small reserve pit (90' x 40' x 8' deep, or less) will be constructed from native soil and clay materials. The reserve pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous will be placed in this pit. Therefore, it is proposed that no synthetic liner be required in the reserve pit. However, if upon constructing the pit there is insufficient fine clay and silt present, a liner will be used for the purpose of reducing water loss through percolation.

Newfield requests approval that a flare pit not be constructed or utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

8. ANCILLARY FACILITIES

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

9. WELL SITE LAYOUT

See attached Location Layout Sheet.

Fencing Requirements

All pits will be fenced according to the following minimum standards:

- A 39-inch net wire shall be used with at least one strand of barbed wire on top of the net.
- b) The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
- c) Corner posts shall be centered and/or braced in such a manner to keep tight at all times
- d) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.
- e) All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Existing fences to be crossed by the access road will be braced and tied off before cutting so as to prevent slacking in the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BLM specifications.

10. PLANS FOR RESTORATION OF SURFACE:

a) Producing Location

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather permitting, the reserve pit will be reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.

b) Dry Hole Abandoned Location

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

11. <u>SURFACE OWNERSHIP</u> – Bureau of Land Management.

12. OTHER ADDITIONAL INFORMATION

The Archaeological Resource Survey and Paleontological Resource Survey for this area are attached. MOAC Report #09-148, 12/14/09. Paleontological Resource Survey prepared by, Wade E. Miller, 8/14/09. See attached report cover pages, Exhibit "D".

Newfield Production Company requests 1,492' of buried water line to be granted.

It is proposed that the disturbed area will be 30' wide to allow for construction of a proposed buried 10" steel water injection line, a buried 3" poly water return line, and a and a 14" surface flow line. Both the proposed surface flow line and buried water lines will tie in to the existing pipeline infrastructure. **Refer to Topographic Map "C."** The proposed water pipelines will be buried in a 4-5' deep trench constructed with a trencher or backhoe for the length of the proposal. The equipment will run on the surface and not be flat bladed to minimize surface impacts to precious topsoil in these High Desert environments. If possible, all proposed surface flow lines will be installed on the same side of the road as existing gas lines. The construction phase of the proposed water lines and proposed flow line will last approximately (5) days.

In the event that the proposed well is converted to a water injection well, a Sundry Notice 3160-5 form will be applied for through the Bureau of Land Management field office.

For a ROW plan of development, please refer to the Greater Monument Butte Green River Development SOP and as well as the Castle Peak and Eight Mile Flat Reclamation and Weed Management Plan.

Water Disposal

After first production, if the production water meets quality guidelines, it will be transported to the Ashley, Monument Butte, Jonah, South Wells Draw and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project. Water not meeting quality criteria, will be disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E), Federally approved surface disposal facilities or at a State of Utah approved surface disposal facilities.

Additional Surface Stipulations

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

Details of the On-Site Inspection

The proposed GMBU L-33-8-16 was on-sited on 1/26/11. The following were present; Tim Eaton (Newfield Production), Janua Simonsen (Bureau of Land Management), and Suzanne Grayson (Bureau of Land Management).

Hazardous Material Declaration

Newfield Production Company guarantees that during the drilling and completion of the GMBU L-33-8-16, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the GMBU L-33-8-16, Newfield will use, produce, store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

13. <u>LESSEE'S OR OPERATOR'S REPRENSENTATIVE AND CERTIFICATION:</u>

Representative

Name:

Tim Eaton

Address:

Newfield Production Company

Route 3, Box 3630

Myton, UT 84052

Telephone: (435) 646-3721

Certification

Please be advised that NEWFIELD PRODUCTION COMPANY is considered to be the operator of well #L-33-8-16, Section 33, Township 8S, Range 16E: Lease UTU-34173 Duchesne County, Utah: and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by, Federal Bond #WYB000493.

I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of the 18 U.S.C. 1001 for the filing of a false statement.

<u>4/14/11</u> Date Mandie Crozier
Regulatory Specialist

Newfield Production Company

2-M SYSTEM

Blowout Prevention Equipment Systems




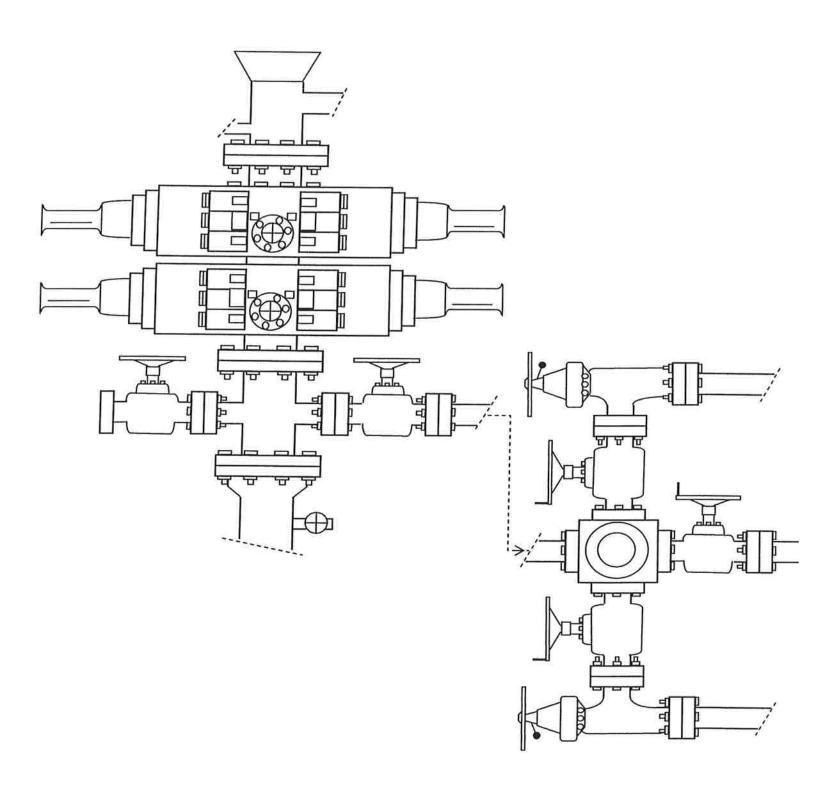


EXHIBIT C

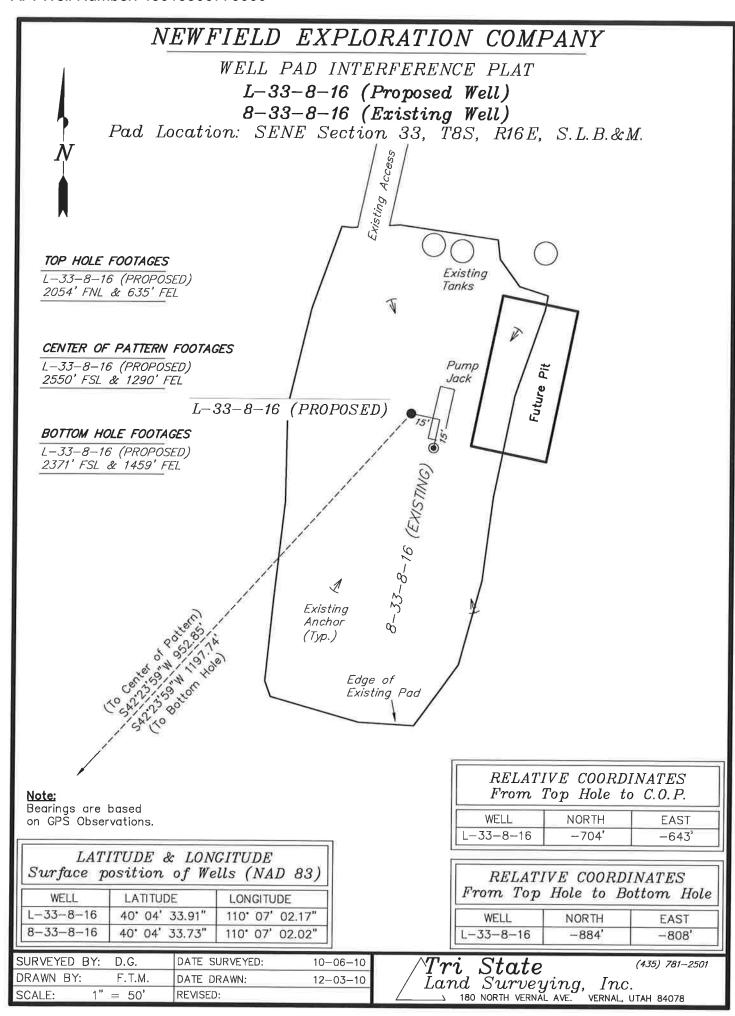

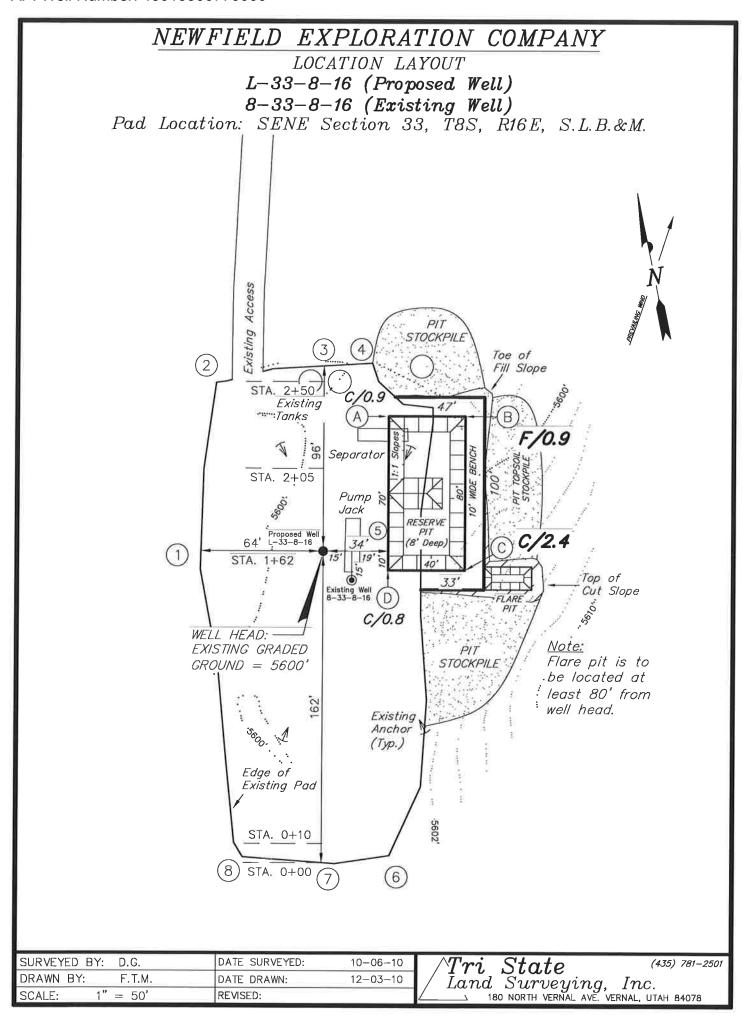

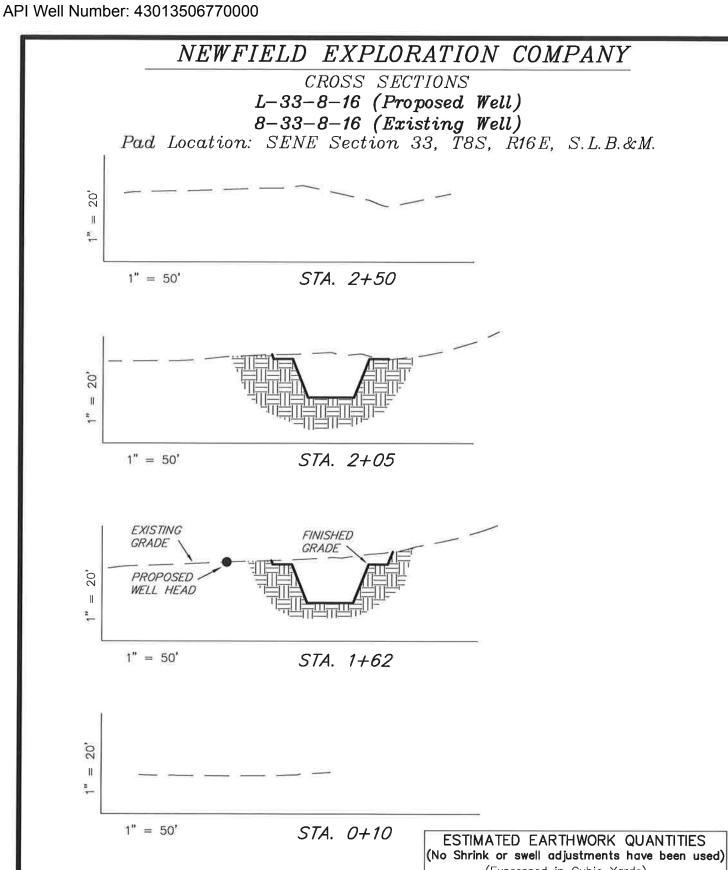

NOTE	Ξ;			
UNLE	ESS OTHE	ERWIS	SE N	IOTED
CUT	SLOPES	ARE	ΑT	1:1
FILL	SLOPES	ARE	AT	1.5:1

(No Shrin	(No Shrink or swell adjustments have been used) (Expressed in Cubic Yards)											
ITEM	CUT	FILL	6" TOPSOIL	EXCESS								
PAD	200	20	Topsoil is not included	180								
PIT	640	0	in Pad Cut	640								

SURVEYED BY:	D.G.	DATE SURVEYED:	10-06-10
DRAWN BY:	F.T.M.	DATE DRAWN:	12-03-10
SCALE: 1"	= 50'	REVISED:	

Ari S	State	(435) 781–2501
	Surveying,	Inc.
	NORTH VERNAL AVE. VI	ERNAL, UTAH 84078

130

820

TOTALS

840

NEWFIELD EXPLORATION COMPANY TYPICAL RIG LAYOUT L-33-8-16 (Proposed Well) 8-33-8-16 (Existing Well) Pad Location: SENE Section 33, T8S, R16E, S.L.B.&M. Access Existing Existing Tanks YELLOW BOILER 47 PUMP FIVEL STORAGE TANK PUMP Sep TANK Pump PLANT HOUSE Jack WATER SUB PARTS 등64' 34 Deep) 40' 33' Existing Well 8-33-8-16 FLARE PIPE RACKS 82 B TOILET Note: Flare pit is to PIPE RACKS be located at least 80' from well head. Existing Anchor (Typ.) Edge of Existing Pad Tri~State (435) 781-. Land Surveying, Inc. $_$ 180 NORTH VERNAL AVE. VERNAL, UTAH 84078 SURVEYED BY: DATE SURVEYED: 10-06-10 (435) 781-2501 D.G. DRAWN BY: F.T.M. 12-03-10 DATE DRAWN: 1'' = 50'REVISED: SCALE:



VIA ELECTRONIC DELIVERY

April 15, 2011

State of Utah, Division of Oil, Gas and Mining ATTN: Diana Mason P.O. Box 145801 Salt Lake City, UT 84114-5801

RE: Directional Drilling

GMBU L-33-8-16

Greater Monument Butte (Green River) Unit

Surface Hole:

T8S-R16E Section 33: SENE (UTU-34173)

2054' FNL 635' FEL

At Target:

T8S-R16E Section 33: NWSE (UTU-49092)

2371' FSL 1459' FEL

Duchesne County, Utah

Dear Ms. Mason:

Pursuant to the filing by Newfield Production Company (NPC) of an Application for Permit to Drill the above referenced well dated 4/14/11, a copy of which is attached, and in accordance with Oil and Gas Conservation Rule R649-3-11, NPC hereby submits this letter as notice of our intention to directionally drill this well.

The surface hole and target locations of this well are both within the boundaries of the Greater Monument Butte Unit (UTU-87538X), of which Newfield certifies that it is the operator. Further, Newfield certifies that all lands within 460 feet of the entire directional well bore are within the Greater Monument Butte Unit.

NPC is permitting this well as a directional well in order to mitigate surface disturbance by utilizing preexiting roads and pipelines.


NPC hereby requests our application for permit to drill be granted pursuant to R649-3-11. If you have any questions or require further information, please contact the undersigned at 303-383-4197 or by email at sgillespie@newfield.com. Your consideration in this matter is greatly appreciated.


Sincerely,

Newfield Production Company

Shane Gillespie Land Associate

Form 3160 - 3 (August 2007)			FORM APPROVED OMB No. 1004-0137 Expires July 31, 2010 5. Lease Serial No. UTU-34173 6. If Indian, Allotee or Tribe Name NA				
UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT APPLICATION FOR PERMIT TO DRILL OR REENTER							
							la. Type of work: ✓ DRILL REENTE
o. Type of Well: Oil Well Gas Well Other Single Zone Multiple Zone			ale Zone	8. Lease Name and Well No. GMBU L-33-8-16			
2. Name of Operator Newfield Production Company				9. API Well No.			
. Address Route #3 Box 3630, Myton UT 84052 3b. Phone No. (include area code) (435) 646-3721				10. Field and Pool, or Exploratory Monument Butte			
4. Location of Well (Report location clearly and in accordance with any State requirements.*)				11. Sec., T. R. M. or Blk. and Survey or Area			
At surface SE/NE 2054' FNL 635' FEL Sec. 33, T8S R16E (UTU-34173) At proposed prod. zonc NW/SE 2371' FSL 1459' FEL Sec. 33, T8S R16E (UTU-49092)				Sec. 33, T8S R16E			
14 Distance in miles and direction from nearest town or post office* Approximately 11.6 miles southwest of Myton, UT				12. County or Parish Duchesne		13. State UT	
Distance from proposed* location to nearest property or lease line, ft. Approx. 269' f/lse, NA f/unit (Also to nearest drig, unit line, if any)	16 No. of a		17. Spacin	pacing Unit dedicated to this well 20 Acres			
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. Approx. 938'	121 Holysbea (selvin			WYB000493			
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5600' GL	22 Approximate date work will start*			Estimated duration (7) days from SPUD to rig release			
	24. Attac						
The following, completed in accordance with the requirements of Onshore	e Oil and Gas						
 Well plat certified by a registered surveyor. A Drilling Plan. A Surface Use Plan (if the location is on National Forest System I SUPO must be filed with the appropriate Forest Service Office). 	Lands, the	Item 20 above). 5. Operator certific	alion	ns unless covered by an			
25 Signature		Name (Printed Typed) Mandie Crozier		Date		14/11	
Title Regulatory Specialist							
Approved by (Signature)		Name (Printed/Typed)		Dat			
Title	Office						
Application approval does not warrant or certify that the applicant holds conduct operations thereon. Conditions of approval, if any, are attached.				-			
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a cri States any false, fictitious or fraudulent statements or representations as to	ime for any pe to any matter w	erson knowingly and vithin its jurisdiction.	villfully to n	nake to any department	or agency	of the United	
(Continued on page 2)				*(Inst	truction	s on page 2)	

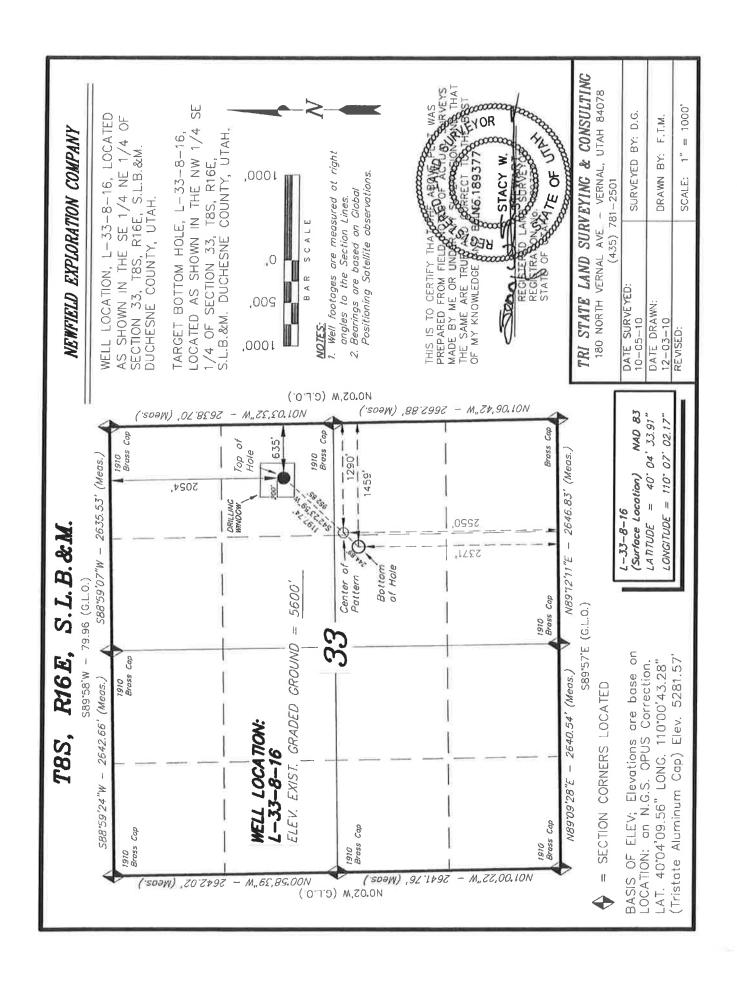

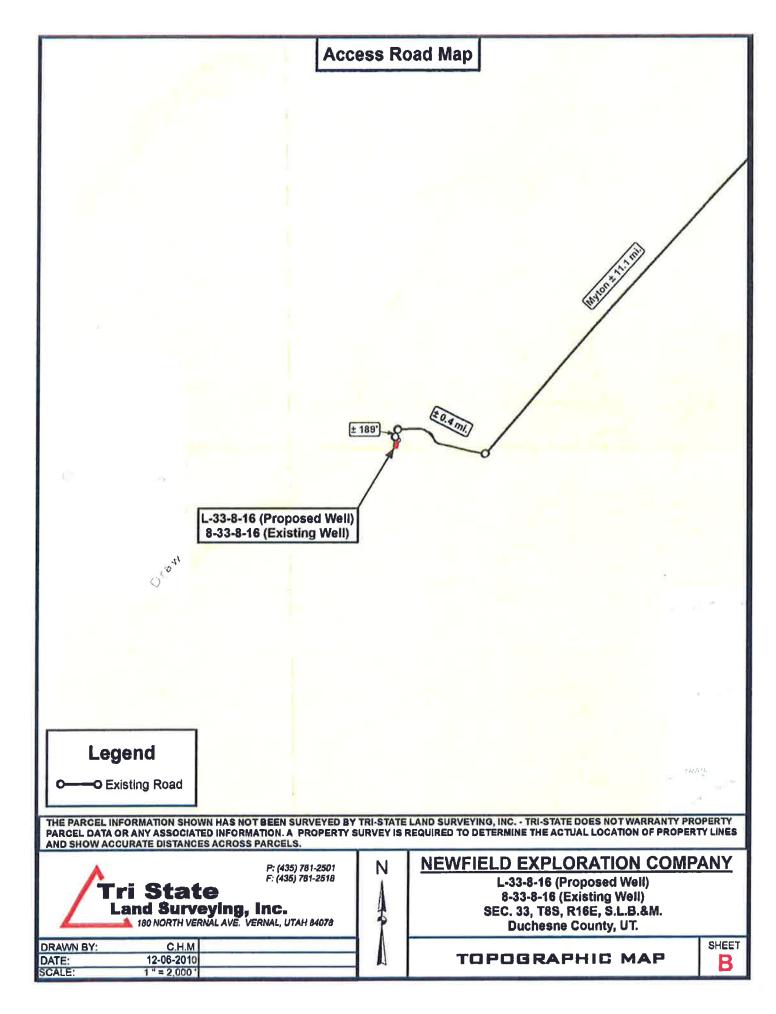

United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Utah State Office P.O. Box 45155 Salt Lake City, Utah 84145-0155

IN REPLY REFER TO: 3160 (UT-922)

April 15, 2011

Memorandum

To: Assistant District Manager Minerals, Vernal District

From: Michael Coulthard, Petroleum Engineer

Subject: 2011 Plan of Development Greater Monument

Butte Unit, Duchesne and Uintah Counties,

Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2011 within the Greater Monument Butte Unit, Duchesne and Uintah Counties, Utah.

API#	WELL NAME	LO	OCATION			
(Proposed PZ	GREEN RIVER)					
43-013-50677	GMBU L-33-8-16 BHL	Sec 33 Sec 33				
43-013-50678	GMBU M-33-8-16 BHL	Sec 33 Sec 33			_	
43-013-50679	GMBU N-33-8-16 BHL	Sec 33 Sec 33			_	
43-047-51559	GMBU L-24-8-17 BHL	Sec 24 Sec 24				
43-047-51560	GMBU R-24-8-17 BHL	Sec 24 Sec 24				
43-013-50680	GMBU N-30-8-17 BHL	Sec 30 Sec 30				
43-013-50681	GMBU J-10-9-16 BHL	Sec 11 Sec 10		 		
43-013-50683	GMBU F-14-9-16 BHL	Sec 15 Sec 14				

Page 2

API# WELL NAME LOCATION

(Proposed PZ GREEN RIVER)

43-013-50684 GMBU V-6-9-17 Sec 07 T09S R17E 0722 FNL 0673 FEL BHL Sec 06 T09S R17E 0248 FSL 1585 FEL

43-013-50685 GMBU G-7-9-17 Sec 07 T09S R17E 1972 FNL 0633 FWL BHL Sec 07 T09S R17E 1011 FNL 1405 FWL

This office has no objection to permitting the wells at this time.


Michael L. Coulthard

Digitally signed by Michael L. Coulthard

DN: cn=Michael L. Coulthard, o=Bureau of Land Management,
ou=Branch of Minerals, email=Michael_Coulthard@blm.gov, c=US
Date: 2011.04.15 11:30:49-06:00'

bcc: File - Greater Monument Butte Unit
 Division of Oil Gas and Mining
 Central Files
 Agr. Sec. Chron
 Fluid Chron

MCoulthard:mc:4-15-11

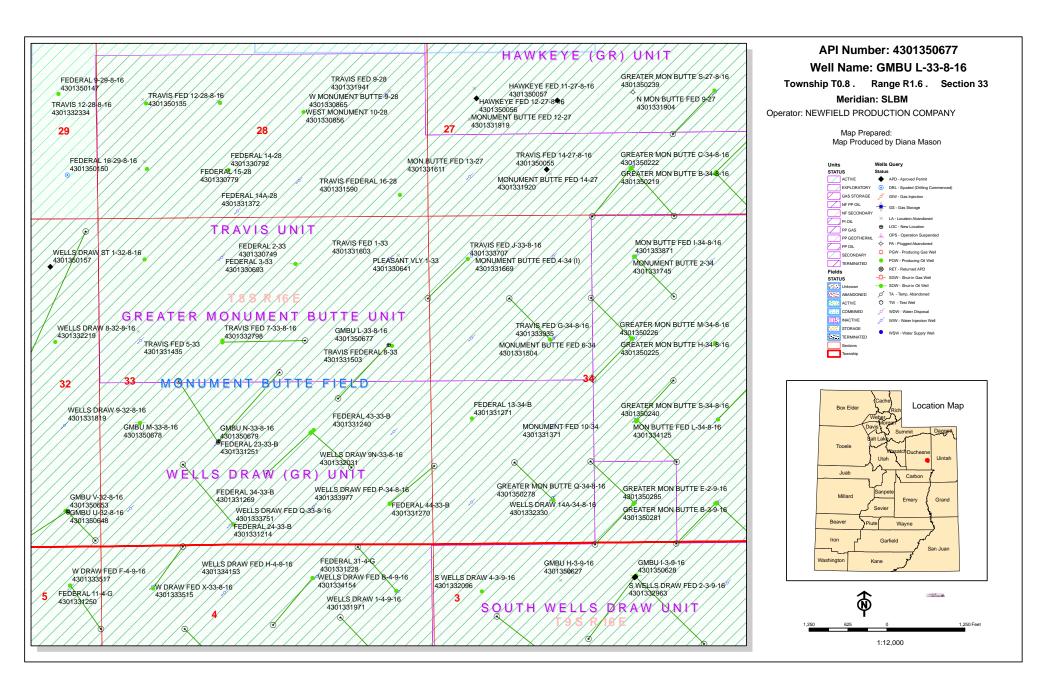

WORKSHEET APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 4/14/2011 **API NO. ASSIGNED:** 43013506770000

WELL NAME: GMBU L-33-8-16

PHONE NUMBER: 435 646-4825 **OPERATOR:** NEWFIELD PRODUCTION COMPANY (N2695)

CONTACT: Mandie Crozier

PROPOSED LOCATION: SENE 33 080S 160E **Permit Tech Review:**

> **SURFACE: 2054 FNL 0635 FEL Engineering Review:**

> **BOTTOM:** 2371 FSL 1459 FEL Geology Review:

COUNTY: DUCHESNE

LATITUDE: 40.07602 LONGITUDE: -110.11655 UTM SURF EASTINGS: 575330.00 NORTHINGS: 4436359.00

FIELD NAME: MONUMENT BUTTE

LEASE TYPE: 1 - Federal

LEASE NUMBER: UTU-34173 PROPOSED PRODUCING FORMATION(S): GREEN RIVER SURFACE OWNER: 1 - Federal **COALBED METHANE: NO**

RECEIVED AND/OR REVIEWED: LOCATION AND SITING:

 PLAT R649-2-3.

Unit: GMBU (GRRV) Bond: FEDERAL - WYB000493

Potash R649-3-2. General

Oil Shale 190-5

Oil Shale 190-3 R649-3-3. Exception

Oil Shale 190-13 **Drilling Unit**

Board Cause No: Cause: 213-11 Water Permit: 437478

Effective Date: 11/30/2009 **RDCC Review:**

Siting: Suspends General Siting **Fee Surface Agreement**

Intent to Commingle ■ R649-3-11. Directional Drill


Commingling Approved

Comments: Presite Completed

Stipulations: 4 - Federal Approval - dmason

15 - Directional - dmason 27 - Other - bhill

API Well No: 43013506770000



State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

Permit To Drill

Well Name: GMBU L-33-8-16 API Well Number: 43013506770000 Lease Number: UTU-34173 Surface Owner: FEDERAL

Approval Date: 4/18/2011

Issued to:

NEWFIELD PRODUCTION COMPANY, Rt 3 Box 3630, Myton, UT 84052

Authority:

Pursuant to Utah Code Ann. §40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of Cause: 213-11. The expected producing formation or pool is the GREEN RIVER Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

Duration:

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

Conditions of Approval:

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

In accordance with Utah Admin. R.649-3-11, Directional Drilling, the operator shall submit a complete angular deviation and directional survey report to the Division within 30 days following completion of the well.

Production casing cement shall be brought up to or above the top of the unitized interval for the Greater Monument Butte Unit (Cause No. 213-11).

Notification Requirements:

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

• Within 24 hours following the spudding of the well – contact Carol Daniels at 801-538-5284 (please leave a voicemail message if not available)

OR

submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website at http://oilgas.ogm.utah.gov

API Well No: 43013506770000


Reporting Requirements:

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) due within 5 days of spudding the well
- Monthly Status Report (Form 9) due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) due prior to implementation
- Written Notice of Emergency Changes (Form 9) due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) due prior to implementation
- Report of Water Encountered (Form 7) due within 30 days after completion
- Well Completion Report (Form 8) due within 30 days after completion or plugging

Approved By:

For John Rogers Associate Director, Oil & Gas



Form 3160-3 (August 2007)

APK 1 & 2011

UNITED STATES

DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT ALLITAH

FORM APPROVED OMB No. 1004-0137 Expires July 31, 2010

- Lease Serial No. UTU-34173

DRILL O	R REENTER	*.	6. If Indian, Allotee o	or intervame	
a. Type of work: DRILL REENTER					
lb. Type of Well: ✓ Oil Well Gas Well Other ✓ Single Zone Multiple Zone					
			9. API Well No.	70(077	
	,		10. Field and Pool, or Exploratory		
R16E (UTU	J-34173)		11. Sec., T. R. M. or Blk.and Survey or Area Sec. 33, T8S R16E		
s. 33, 18S R	16E (UTU-49092)		12. County or Parish Duchesne	13. State	
1		17. Spacin	17. Spacing Unit dedicated to this well 20 Acres		
1	· •		WBIA Bond No. on file WYB000493		
22 Approx	mate date work will sta	rt*	23. Estimated duration (7) days from SPUD) to rig release	
		ttached to the	a form		
Lands, the	4. Bond to cover the stem 20 above).5. Operator certification.6. Such other site.	he operation	ns unless covered by an ex		
	(Printed/Typed)			Pate (14/1)	
Name	Printed/Typed)	HmH		Pare AUG 25 20	
	VERNA				
ls legal or equi				• •	
rime for any p	erson knowingly and w				
	3b. Phone N (435) The State requirer R16E (UTL 33, T8S R 16. No. of 320 19. Propose 6,5 22. Approxi 24. Attaine Oil and Gas Lands, the Name Mano Name Mano Silve Gallor equirer Is legal or equirer	TER Single Zone Multi M	TER Single Zone Multiple Zone 3b. Phone No. (include area code) (435) 646-3721 My State requirements.*) R16E (UTU-34173) 33, T8S R16E (UTU-49092) 16. No. of acres in lease 320.00 19. Proposed Depth 20. BLM/1 6,528' V 22. Approximate date work will start* 24. Attachments 4. Bond to cover the operation lem 20 above). Lands, the 5. Operator certification 6. Such other site specific info BLM. Name (Printed/Typed) Mandie Crozier Name (Printed/Typed) Mandie Crozier Name (Printed/Typed) Company person knowingly and willfully to me company person knowingly and will the company person knowingly and will the me company person knowingly and will the company person knowin	TER Table	

(Continued on page 2)

*(Instructions on page 2)

UDOGN

RECEIVED

AUG 2 9 2011

DIV. OF OIL, GAS & MINING

NOTICE OF APPROVAL

115X50196A

NOS 12/30/10



UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT VERNAL FIELD OFFICE

VERNAL FIELD OFFICE VERNAL, UT 84078

(435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company: Well No:

Newfield Production Company

170 South 500 East

GMBU L-33-8-16

API No: 43-013-50677

Location: Lease No: SENE, Sec. 33, T8S, R16E

UTU-34173

Agreement: Greater Monument Butte Unit

OFFICE NUMBER:

(435) 781-4400

OFFICE FAX NUMBER:

(435) 781-3420

A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR FIELD REPRESENTATIVE TO INSURE COMPLIANCE

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.

NOTIFICATION REQUIREMENTS

-	Forty-Eight (48) hours prior to construction of location and access roads.
-	Prior to moving on the drilling rig.
_	Twenty-Four (24) hours prior to spudding the well.
-	Twenty-Four (24) hours prior to running casing and cementing all casing strings to: ut vn opreport@blm.gov.
-	Twenty-Four (24) hours prior to initiating pressure tests.
_	Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.
	-

SURFACE USE PROGRAM CONDITIONS OF APPROVAL (COAs)

- All new and replacement internal combustion gas field engines of less than or equal to 300 designrated horsepower must not emit more than 2 gms of NO_x per horsepower-hour. This requirement does not apply to gas field engines of less than or equal to 40 design-rated horsepower.
- All and replacement internal combustion gas field engines of greater than 300 design rated horsepower must not emit more than 1.0 gms of NO_x per horsepower-hour.
- If there is an active Gilsonite mining operation within 2 miles of the well location, operator shall notify the Gilsonite operator at least 48 hours prior to any blasting during construction.
- If paleontological materials are uncovered during construction, the operator is to immediately stop
 work and contact the Authorized Officer (AO). A determination will be made by the AO as to what
 mitigation may be necessary for the discovered paleontologic material before construction can
 continue.

CONDITIONS OF APPROVAL:

- Parent well pad 8-33-8-16 with directional well L-33-8-16 is bordered by site 42Dc538. This
 archaeological site is evaluated as "eligible" to the National Register of Historic Places (NRHP). The
 site must be monitored by a qualified archaeologist during construction and drilling.
- After cessation of drilling and completion operations, any visible or measurable layer of oil must be removed from the surface of the reserve pit and the pit kept free of oil.
- Pits must be free of oil and other liquid and solid wastes prior to filling. Pit liners must not be breached (cut) or filled (squeezed) while still containing fluids. The pit liner must be removed to the solids level or treated to prevent its reemergence to the surface or its interference with long-term successful revegetation.

<u>If</u> construction and drilling is anticipated during any of the following wildlife seasonal or spatial restrictions, a qualified consulting firm biologist must be contacted 2 weeks prior in order to conduct applicable surveys using an accepted protocol prior to any ground disturbing activities.

- Mountain plover surveys will be conducted to protocol by a professional environmental consulting
 firm biologist prior to any ground disturbing activities. Reports from survey results must be
 reviewed by a BLM authorized officer prior to proceeding with the project. A seasonal restriction
 for all ground disturbing activities in mountain plover habitat from May 1-June 15 is required.
- White-tailed prairie dog burrows and animals sighted will be recorded/mapped while conducting (to protocol) burrowing owl surveys. If burrowing owls/burrows are located, a seasonal restriction from March 1-August 31 within 0.25 miles is required.
- No construction or drilling will occur from 1/1-8/31 (.5 miles) to protect golden eagles s during the
 nesting season. If during the surveys known nests/habitat is found to be inactive, an exemption
 may be requested in writing, survey results reviewed and approved by a BLM minerals biologist
 before granting the exemption.

Page 3 of 7 Well: GMBU L-33-8-16 8/24/2011

• Three raptor nest surveys must be conducted during the nesting season within ½ mile of the project area(s). It is recommended that these surveys be spaced 3 weeks apart, so nesting status and reproductive success can be verified and documented.

Reclamation

- Reclamation will be completed in accordance with the Newfield Exploration Company Castle Peak and Eight Mile Flat Reclamation Plan on file with the Vernal Field Office of the BLM.
- The reclamation seed mix will incorporate low growing grasses, instead of crested wheatgrass, which negatively impacts mountain plover habitat.
- Appropriate erosion control and revegetation measures will be employed. In areas with unstable
 soils where seeding alone may not adequately control erosion, grading will be used to minimize
 slopes and water bars will be installed on disturbed slopes. Erosion control efforts will be monitored
 by Newfield and, if necessary, modifications will be made to control erosion.

Monitoring and Reporting

- The operator shall submit a Sundry Notice (Form 3160-5) to the BLM Authorized Officer (AO) that
 designates the proposed site-specific monitoring and reference sites chosen for the location. A
 description of the proposed sites shall be included, as well as a map showing the locations of the
 proposed sites.
- The operator shall submit a Sundry Notice (Form 3160-5) to the BLM Authorized Officer (AO) 3 growing seasons after reclamation efforts have occurred evaluating the status of the reclaimed areas in order to determine whether the BLM standards set forth in the Green River District Reclamation Guidelines have been met (30% or greater basal cover).

Page 4 of 7 Well: GMBU L-33-8-16 8/24/2011

DOWNHOLE PROGRAM CONDITIONS OF APPROVAL (COAs)

SITE SPECIFIC DOWNHOLE COAs:

 Newfield Production Co. shall comply with all applicable requirements in the SOP (version: "Greater Monument Butte Green River Development Program", June 24, 2008). The operator shall also comply with applicable laws and regulations; with lease terms, Onshore Oil and Gas Orders, NTL's; and with other orders and instructions of the authorized officer.

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily
 drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order
 No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a
 test pump with a chart recorder and <u>NOT</u> by the rig pumps. Test shall be reported in the driller's
 log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- Cement baskets shall not be run on surface casing.
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is
 encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal
 Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB

Page 5 of 7 Well: GMBU L-33-8-16 8/24/2011

or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.

- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM,
 Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- Please submit an electronic copy of all other logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

Page 6 of 7 Well: GMBU L-33-8-16 8/24/2011

OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- For information regarding production reporting, contact the Office of Natural Resources Revenue (ONRR) at www.ONRR.gov.
- Should the well be successfully completed for production, the BLM Vernal Field office must be
 notified when it is placed in a producing status. Such notification will be by written communication
 and must be received in this office by not later than the fifth business day following the date on
 which the well is placed on production. The notification shall provide, as a minimum, the following
 informational items:
 - o Operator name, address, and telephone number.
 - Well name and number.
 - Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - o The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and/or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs,

Page 7 of 7 Well: GMBU L-33-8-16 8/24/2011

core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office
 Petroleum Engineers will be provided with a date and time for the initial meter calibration and all
 future meter proving schedules. A copy of the meter calibration reports shall be submitted to the
 BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid
 hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall
 be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering
 lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a
 suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be
 obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover
 equipment shall be removed from a well to be placed in a suspended status without prior approval
 of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior
 approval of the BLM Vernal Field Office shall be obtained and notification given before resumption
 of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office
 Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in
 order that a representative may witness plugging operations. If a well is suspended or abandoned,
 all pits must be fenced immediately until they are backfilled. The "Subsequent Report of
 Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of
 the well bore, showing location of plugs, amount of cement in each, and amount of casing left in
 hole, and the current status of the surface restoration.

			1		
	STATE OF UTAH		FORM 9		
	5.LEASE DESIGNATION AND SERIAL NUMBER: UTU-34173				
SUNDF	6. IF INDIAN, ALLOTTEE OR TRIBE NAME:				
	oposals to drill new wells, significantly de reenter plugged wells, or to drill horizont n for such proposals.		7.UNIT or CA AGREEMENT NAME: GMBU (GRRV)		
1. TYPE OF WELL Oil Well			8. WELL NAME and NUMBER: GMBU L-33-8-16		
2. NAME OF OPERATOR: NEWFIELD PRODUCTION CO	OMPANY		9. API NUMBER: 43013506770000		
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT		PHONE NUMBER: Ext	9. FIELD and POOL or WILDCAT: MONUMENT BUTTE		
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2054 FNL 0635 FEL			COUNTY: DUCHESNE		
QTR/QTR, SECTION, TOWNS	HIP, RANGE, MERIDIAN: 33 Township: 08.0S Range: 16.0E Meridia	n: S	STATE: UTAH		
11. CHEC	K APPROPRIATE BOXES TO INDICATE	NATURE OF NOTICE, REPOR	RT, OR OTHER DATA		
TYPE OF SUBMISSION		TYPE OF ACTION			
	ACIDIZE	ALTER CASING	CASING REPAIR		
NOTICE OF INTENT Approximate date work will start:	CHANGE TO PREVIOUS PLANS	CHANGE TUBING	CHANGE WELL NAME		
4/18/2012	CHANGE WELL STATUS	COMMINGLE PRODUCING FORMATIONS	CONVERT WELL TYPE		
SUBSEQUENT REPORT	DEEPEN [FRACTURE TREAT	NEW CONSTRUCTION		
Date of Work Completion:	OPERATOR CHANGE	PLUG AND ABANDON	PLUG BACK		
	PRODUCTION START OR RESUME	RECLAMATION OF WELL SITE	RECOMPLETE DIFFERENT FORMATION		
SPUD REPORT Date of Spud:	l <u></u>	7			
Date of Space.	REPERFORATE CURRENT FORMATION	SIDETRACK TO REPAIR WELL	☐ TEMPORARY ABANDON		
	L TUBING REPAIR	☐ VENT OR FLARE	WATER DISPOSAL		
DRILLING REPORT Report Date:	WATER SHUTOFF	SI TA STATUS EXTENSION	✓ APD EXTENSION		
	WILDCAT WELL DETERMINATION	OTHER	OTHER:		
I .	COMPLETED OPERATIONS. Clearly show all		depths, volumes, etc.		
Newfield proposes	to extend the Application for	Permit to Drill for one	Approved by the		
	year.		Utah Division of Oil, Gas and Mining		
			Date: April 09, 2012		
			By: Laggill		
			Ų ū		
NAME (PLEASE PRINT)	PHONE NUMBE	R TITLE			
Mandie Crozier	435 646-4825	Regulatory Tech			
SIGNATURE N/A		DATE 4/4/2012			



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43013506770000

API: 43013506770000 Well Name: GMBU L-33-8-16

Location: 2054 FNL 0635 FEL QTR SENE SEC 33 TWNP 080S RNG 160E MER S

Company Permit Issued to: NEWFIELD PRODUCTION COMPANY

Date Original Permit Issued: 4/18/2011

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

• If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
 Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
• Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
 Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
• Has the approved source of water for drilling changed? Yes No
 Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
• Is bonding still in place, which covers this proposed well? Yes No
nature: Mandie Crozier Date: 4/4/2012

Title: Regulatory Tech Representing: NEWFIELD PRODUCTION COMPANY

	STATE OF UTAH		FORM 9		
	5.LEASE DESIGNATION AND SERIAL NUMBER: UTU-34173				
SUND	RY NOTICES AND REPORTS	ON WELLS	6. IF INDIAN, ALLOTTEE OR TRIBE NAME:		
	oposals to drill new wells, significantly reenter plugged wells, or to drill horizo m for such proposals.		7.UNIT or CA AGREEMENT NAME: GMBU (GRRV)		
1. TYPE OF WELL Oil Well			8. WELL NAME and NUMBER: GMBU L-33-8-16		
2. NAME OF OPERATOR: NEWFIELD PRODUCTION C	OMPANY		9. API NUMBER: 43013506770000		
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT	Г, 84052 435 646-4825	PHONE NUMBER: 5 Ext	9. FIELD and POOL or WILDCAT: MONUMENT BUTTE		
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2054 FNL 0635 FEL			COUNTY: DUCHESNE		
QTR/QTR, SECTION, TOWNS	HIP, RANGE, MERIDIAN: 33 Township: 08.0S Range: 16.0E Meridi	ian: S	STATE: UTAH		
11. CHEC	CK APPROPRIATE BOXES TO INDICAT	TE NATURE OF NOTICE, REPOR	RT, OR OTHER DATA		
TYPE OF SUBMISSION		TYPE OF ACTION			
	ACIDIZE	ALTER CASING	CASING REPAIR		
NOTICE OF INTENT Approximate date work will start:	CHANGE TO PREVIOUS PLANS	CHANGE TUBING	CHANGE WELL NAME		
4/18/2013	CHANGE WELL STATUS	COMMINGLE PRODUCING FORMATIONS	CONVERT WELL TYPE		
SUBSEQUENT REPORT	DEEPEN	FRACTURE TREAT	☐ NEW CONSTRUCTION		
Date of Work Completion:	OPERATOR CHANGE	PLUG AND ABANDON	PLUG BACK		
	PRODUCTION START OR RESUME	RECLAMATION OF WELL SITE	RECOMPLETE DIFFERENT FORMATION		
SPUD REPORT Date of Spud:	REPERFORATE CURRENT FORMATION	SIDETRACK TO REPAIR WELL	TEMPORARY ABANDON		
	TUBING REPAIR	VENT OR FLARE	WATER DISPOSAL		
DRILLING REPORT	WATER SHUTOFF	SI TA STATUS EXTENSION	✓ APD EXTENSION		
Report Date:		SI TA STATUS EXTENSION			
	WILDCAT WELL DETERMINATION	□ OTHER	OTHER:		
	R COMPLETED OPERATIONS. Clearly show a				
Newfield proposes	to extend the Application for	Permit to Drill this well	Approved by the Utah Division of		
			Oil, Gas and Mining		
			Date: April 10, 2013		
			Date: Npm 10, 2010		
			By: Dally		
NAME (DI EASE BRINT)	DIANE MUSE	ED TITI E			
NAME (PLEASE PRINT) Mandie Crozier	PHONE NUMB 435 646-4825	ER TITLE Regulatory Tech			
SIGNATURE N/A		DATE 4/4/2013			



The Utah Division of Oil, Gas, and Mining

Title: Regulatory Tech Representing: NEWFIELD PRODUCTION COMPANY

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43013506770000

API: 43013506770000 **Well Name:** GMBU L-33-8-16

Location: 2054 FNL 0635 FEL QTR SENE SEC 33 TWNP 080S RNG 160E MER S

Company Permit Issued to: NEWFIELD PRODUCTION COMPANY

Date Original Permit Issued: 4/18/2011

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

to drowing to a chocknet of bonne foliated to the application, which chocks be verified.
 If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes No
 Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes No
 Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes No
 Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? Yes No
• Has the approved source of water for drilling changed? 🔘 Yes 📵 No
 Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes No
• Is bonding still in place, which covers this proposed well? 🌘 Yes 🔘 No
Signature: Mandie Crozier Date: 4/4/2013

RECEIVED: Apr. 04, 2013

Operator Newfield Exploration Rig Name/# Pro Petro # 8 Submitted By Branden Arnold Phone Number 435-401-0223 Well Name/Number GMBU L-33-8-16 Qtr/Qtr SE/NE Section 33 Township 8S Range 16E Lease Serial Number UTU-34173 API Number 43-013-50677
<u>Spud Notice</u> – Spud is the initial spudding of the well, not drilling out below a casing string.
Date/Time <u>5/2/13</u> <u>8:00</u> AM ⊠ PM □
Casing − Please report time casing run starts, not cementing times. Surface Casing Intermediate Casing Production Casing Liner Other
Date/Time <u>5/2/13</u> <u>3:00</u> AM ☐ PM ⊠
BOPE Initial BOPE test at surface casing point BOPE test at intermediate casing point 30 day BOPE test Other
Date/Time AM PM
Remarks

	STATE OF UTAH DEPARTMENT OF NATURAL RESOUR		FORM 9		
ι	5.LEASE DESIGNATION AND SERIAL NUMBER: UTU-34173				
SUNDR	Y NOTICES AND REPORTS	ON WELLS	6. IF INDIAN, ALLOTTEE OR TRIBE NAME:		
	posals to drill new wells, significantly reenter plugged wells, or to drill horizon for such proposals.		7.UNIT or CA AGREEMENT NAME: GMBU (GRRV)		
1. TYPE OF WELL Oil Well			8. WELL NAME and NUMBER: GMBU L-33-8-16		
2. NAME OF OPERATOR: NEWFIELD PRODUCTION CO	DMPANY		9. API NUMBER: 43013506770000		
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT,	, 84052 435 646-482	PHONE NUMBER: 5 Ext	9. FIELD and POOL or WILDCAT: MONUMENT BUTTE		
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2054 FNL 0635 FEL			COUNTY: DUCHESNE		
QTR/QTR, SECTION, TOWNSH	HP, RANGE, MERIDIAN: 3 Township: 08.0S Range: 16.0E Merio	dian: S	STATE: UTAH		
11. CHECK	K APPROPRIATE BOXES TO INDICA	TE NATURE OF NOTICE, REPOR	RT, OR OTHER DATA		
TYPE OF SUBMISSION		TYPE OF ACTION			
	ACIDIZE	ALTER CASING	CASING REPAIR		
NOTICE OF INTENT Approximate date work will start:	CHANGE TO PREVIOUS PLANS	CHANGE TUBING	CHANGE WELL NAME		
Approximate date work will start.	CHANGE WELL STATUS	COMMINGLE PRODUCING FORMATIONS	CONVERT WELL TYPE		
SUBSEQUENT REPORT Date of Work Completion:	DEEPEN	FRACTURE TREAT	NEW CONSTRUCTION		
	OPERATOR CHANGE	PLUG AND ABANDON	PLUG BACK		
SPUD REPORT Date of Spud:	PRODUCTION START OR RESUME	RECLAMATION OF WELL SITE	☐ RECOMPLETE DIFFERENT FORMATION		
5/3/2013	REPERFORATE CURRENT FORMATION	SIDETRACK TO REPAIR WELL	☐ TEMPORARY ABANDON		
DRILLING REPORT	TUBING REPAIR	VENT OR FLARE	WATER DISPOSAL		
Report Date:	WATER SHUTOFF	SI TA STATUS EXTENSION	APD EXTENSION		
	WILDCAT WELL DETERMINATION	OTHER	OTHER:		
On 5/3/13 Pro Petro run 7 jts of 8 5/8" w/160 sks of class (completed operations. Clearly show of # 8 spud and drilled 316' casing set 309.07'KB. On G+2%kcl+.25#CF mixed @ to pit, bump plug to 450psi, notified of spud via ema	of 12 1/4" hole, P/U and 5/15/13 cement w/BH 15.8ppg and 1.17 yield. BLM and State were			
NAME (PLEASE PRINT) Cherei Neilson	PHONE NUMB 435 646-4883	BER TITLE Drilling Techinacian			
SIGNATURE N/A		DATE 5/30/2013			

Casing / Liner Detail

Well	GMBU L-33-8-16
Prospect	Monument Butte
Foreman	
Run Date:	
String Type	Conductor, 14", 36.75#, H-40, W (Welded)

- Detail From Top To Bottom -

Depth	Length	JTS	Description	OD	ID
40.00			13' KB		
13.00	27.00		Conductor	14.000	13.500
40.00			-		

Cement Detail						
Cement C	Company:					
Slurry	# of Sacks	Weight (ppg)	Yield	Volume (ft 3)	Description - Slurry Class and Additives	
Stab-In-Jo	ob?				Cement To Surface?	
BHT:			0		Est. Top of Cement:	
Initial Circulation Pressure:			Plugs Bumped?			
Initial Circulation Rate:			Pressure Plugs Bumped:			
Final Circulation Pressure:			Floats Holding?			
Final Circulation Rate:			Casing Stuck On / Off Bottom?			
Displacement Fluid:			Casing Reciprocated?			
Displacement Rate:			Casing Rotated?			
Displacement Volume:			CIP:			
Mud Returns:			Casing Wt Prior To Cement:			
Centralize	er Type And Pl	lacement:			Casing Weight Set On Slips:	



Casing / Liner Detail

Well	GIVIDU L-33-0-10
Prospect	Monument Butte
Foreman	
Run Date:	
String Type	Surface, 8.625", 24#, J-55, STC (Generic)

- Detail From Top To Bottom -

Depth	Length	JTS	Description	OD	ID
263.27			13' BK		
13.00	1.42		Wellhead		
14.42	248.85	6	8 5/8 Casing	8.625	
263.27	44.83	1	Shoe Joint	8.625	
308.10	0.97		Guide Shoe	8.625	
309.07			-		

Cement Detail								
Cement C	company: E	3J						
Slurry	rry # of Sacks Weight (ppg) Yield Volu				Description - Slurry Class and Additives			
Slurry 1	160	15.8	1.17	187.2	Class G+2%kcl+.25#CF			
Stab-In-Job?			No		Cement To Surface?	Yes		
BHT:			0		Est. Top of Cement:	0		
Initial Circulation Pressure:		ire:			Plugs Bumped?	Yes		
Initial Circulation Rate:					Pressure Plugs Bumped:	450		
Final Circulation Pressure:		re:			Floats Holding?	No		
Final Circulation Rate:					Casing Stuck On / Off Bottom?	No		
Displacement Fluid:		1	Water		Casing Reciprocated?	No		
Displacement Rate:					Casing Rotated?	No		
Displacement Volume:			16		CIP:	9:48		
Mud Returns:					Casing Wt Prior To Cement:			
Centralizer Type And Placement:					Casing Weight Set On Slips:			
		cond and third	for a total	of three.				





Search **Images** Mall Calendar Sites Groups Contacts Mobile More -Mail More 意意を行う進度 Capstar 329 3:02 PM (15 hours ago) Inbox (43) **Operator:** Newfield Production Company Starred Well Name: GMBU L-33-8-16 Important Rig: Capstar 329 Sent Mail Legals: SE/NE Sec. 33, T8S, R16E Drafts (4) **Lease #:** UTU34173 API #: 43-013-50677 Cabinet Contact: (970) 361-3001 Follow up Misc Rig Move Safety Meeting: 6/7/2013 14:00 hrs Notes Est. BOP Test: 6/7/2013 @ 20:00 hrs **Priority** More NEWFIELD Richard Hadlock **Newfield Drilling Supervisor** Capstar 329 Office <u>970 361-3001</u> Search people... den_cap329@nfxrig.com alexishuefner Don Staley Diana Mason alexisheufner Click here to Reply, Reply to all, or Forward barbara nicol Brady Riley Inv... Capstar 329 Cordell Wold 0% full ©2013 Google - Terms of Service -Using 0.2 GB of your 25 GB Last account activity: 23 minu Privacy Policy - Program Policies Dan Jarvis Powered by Google Livingston, Car... RECEIVE > -UN 0 6 2015 DIV. OF OIL, GAS & Mar 2015

https://mail.google.com/mail/u/0/?shva=1#inbox/13f1b4cdfda12a06

Operator Newfield Exploration Rig Name/# NDSI SS #1
Submitted By Xabier Lasa Phone Number 435-823-6014
Well Name/Number GMBU L-33-8-16
Qtr/Qtr NW/SE Section 33 Township 8S Range 16E
Lease Serial Number UTU-34173
API Number 43-013-50677

TD Notice – TD is the final drilling depth of hole.

Date/Time 7-12-13 8:00 AM PM

Casing – Please report time casing run starts, not cementing times.

Surface Casing
Intermediate Casing
Production Casing
Liner
Other

Date/Time <u>7-13-13</u> <u>8:00</u> AM ☐ PM ☐

RECEIVED

JUL 1 1 2013

DIV. OF OIL, GAS & MINING

Operator Newfield Exploration Rig Name/# NDSI SS #1
Submitted By Troy Zufelt Phone Number 435-823-7468
Well Name/Number GMBU L-33-8-16
Qtr/Qtr SE/NE Section 33 Township 8S Range 16E
Lease Serial Number UTU-34173
API Number 43-013-50677

Rig Move Notice — Move drilling rig to new location.

Date/Time 7/9/13 3:30 AM PM

BOPE
Initial BOPE test at surface casing point
BOPE test at intermediate casing point
Other
Date/Time 7-9-13 9:30 AM PM

Remarks _____

RECEIVED

.W. 90 200

DIV. OF OIL, GAS & MINING

Operator Newfield Exploration Rig Name/# NDSI SS #1
Submitted By Xabier Lasa Phone Number 435-823-6014
Well Name/Number GMBU L-33-8-16
Qtr/Qtr NW/SE Section 33 Township 8S Range 16E
Lease Serial Number UTU-34173
API Number 43-013-50677

TD Notice – TD is the final drilling depth of hole.

Date/Time 7-12-13 8:00 AM PM

Casing – Please report time casing run starts, not cementing times.

Surface Casing
Intermediate Casing
Production Casing
Liner
Other

Date/Time 7-13-13 8:00 AM ☐ PM ☐

RECEIVED

nn · 1 2013

DIV. OF OIL, GAS & MINING

	FORM	9			
ι	5.LEASE DESIGNATION AND SERIAL NUMBER: UTU-34173				
SUNDR	6. IF INDIAN, ALLOTTEE OR TRIBE NAME:				
Do not use this form for pro current bottom-hole depth, I FOR PERMIT TO DRILL form	7.UNIT or CA AGREEMENT NAME: GMBU (GRRV)	_			
1. TYPE OF WELL Oil Well				8. WELL NAME and NUMBER: GMBU L-33-8-16	
2. NAME OF OPERATOR: NEWFIELD PRODUCTION CO	DMPANY			9. API NUMBER: 43013506770000	
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT,	, 84052 435 646-482		NE NUMBER:	9. FIELD and POOL or WILDCAT: MONUMENT BUTTE	_
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2054 FNL 0635 FEL		COUNTY: DUCHESNE			
QTR/QTR, SECTION, TOWNSH Qtr/Qtr: SENE Section: 3	STATE: UTAH				
11. CHECI	K APPROPRIATE BOXES TO INDICA	ATE N	ATURE OF NOTICE, REPOR	RT, OR OTHER DATA	_
TYPE OF SUBMISSION			TYPE OF ACTION		
	ACIDIZE		ALTER CASING	CASING REPAIR	_
NOTICE OF INTENT Approximate date work will start:	CHANGE TO PREVIOUS PLANS		CHANGE TUBING	CHANGE WELL NAME	
	CHANGE WELL STATUS		COMMINGLE PRODUCING FORMATIONS	CONVERT WELL TYPE	
SUBSEQUENT REPORT Date of Work Completion:	DEEPEN	□ F	RACTURE TREAT	☐ NEW CONSTRUCTION	
	OPERATOR CHANGE	☐ F	PLUG AND ABANDON	PLUG BACK	
SPUD REPORT	✓ PRODUCTION START OR RESUME		RECLAMATION OF WELL SITE	RECOMPLETE DIFFERENT FORMATION	
Date of Spud:	REPERFORATE CURRENT FORMATION	_	SIDETRACK TO REPAIR WELL	TEMPORARY ABANDON	
✓ DRILLING REPORT	L TUBING REPAIR		ENT OR FLARE	WATER DISPOSAL	
Report Date: 7/31/2013	WATER SHUTOFF		SI TA STATUS EXTENSION	APD EXTENSION	
	WILDCAT WELL DETERMINATION		OTHER	OTHER:	
The above well w	completed operations. Clearly show as placed on production o hours.	n 07	/31/2013 at 18:00	Accepted by the Utah Division of Oil, Gas and Mining FOR RECORD ONLY August 14, 2013	
NAME (PLEASE PRINT) Jennifer Peatross	PHONE NUM 435 646-4885	BER	TITLE Production Technician		
SIGNATURE N/A			DATE 8/14/2013		_